

Contents


	Page		Page
Split Clamps	7-10	U Bolt Clamp	26-27
Sprinkler Clamps	11-13	Conduit Pipe Clamp	28
Clevis Clamps	14-16	Suspended Pipe Clamp	29
U Strap Clamps	17-20	C-Type Steel Beam Clamp	30
Two Bolt Clamps	21-22	Universal Pipe Clamp	31
Riser Clamps	23-25		



CLAMPS

RUBBER LINED SPLIT CLAMP

A

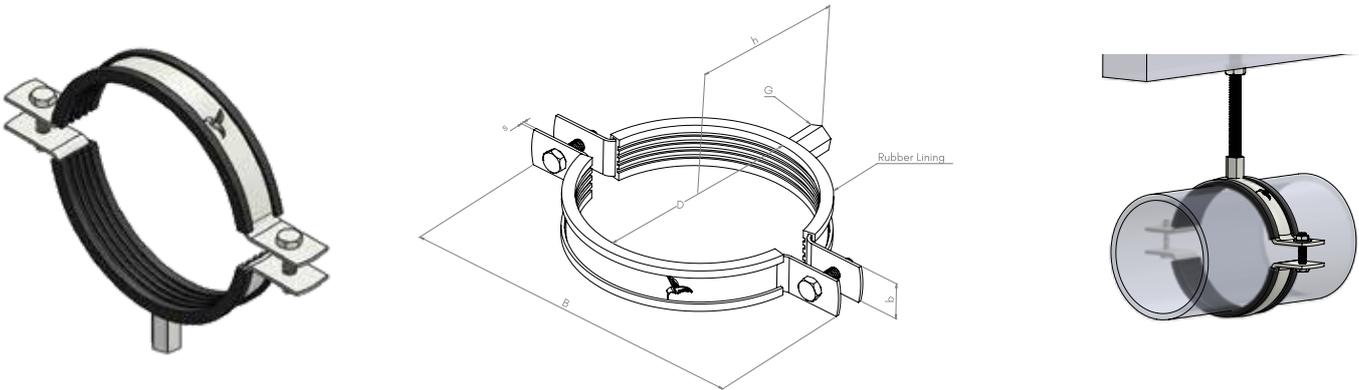

Material: Carbon Steel with EPDM Rubber Lining.
Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
 Hot Dip Galvanized (ASTM A153/EN ISO 1461)
 Armor X 20
Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.
Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.
Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.
Easy Installation: Large opening angle with anti-loss screws for efficient setup.




Part No.	D (mm)	Size (inch)	DN	Dia (mm)	G	B (mm)	H (mm)	h (mm)	b x s (mm)	Rec. Load KG	Qty Pack
IC11500015	15-19	3/8	10	15	M8/M10	60	36	26	19 x 1.2	150	450
IC11500022	20-25	1/2	15	22	M8/M10	65	43	29	19 x 1.2	150	400
IC11500028	26-30	3/4	20	28	M8/M10	70	50	32	19 x 1.2	150	350
IC11500035	32-36	1	25	35	M8/M10	85	56	36	19 x 1.2	150	300
IC11500042	38-43	1 1/4	32	42	M8/M10	92	63	39	19 x 1.2	150	250
IC11500048	47-51	1 1/2	40	48	M8/M10	98	72	42	19 x 1.2	150	200
IC11500054	53-58	-	-	54	M8/M10	104	75	45	19 x 1.2	150	200
IC11500060	60-64	2	50	60	M8/M10	110	81	48	19 x 1.2	150	125
IC11500063	63-66	-	-	63	M8/M10	115	88	51	19 x 1.2	150	125
IC11500070	68-72	-	-	70	M8/M10	120	91	53	19 x 1.2	150	125
IC11500075	74-80	2 1/2	65	75	M8/M10	125	96	56	19 x 1.5	200	100
IC11500083	81-86	-	-	83	M8/M10	139	108	60	19 x 1.5	200	100
IC11500090	87-92	3	80	90	M8/M10	146	111	63	19 x 1.5	200	100
IC11500100	99-105	3 1/2	-	100	M8/M10	156	121	68	19 x 1.5	200	75
IC11500110	107-112	-	-	110	M8/M10	166	131	73	19 x 1.5	200	75
IC11500115	113-118	4	100	115	M8/M10	171	136	76	19 x 1.5	200	70
IC11500125	125-130	-	-	125	M8/M10	181	146	81	19 x 2.0	200	70
IC11500133	131-137	-	-	133	M8/M10	184	154	85	19 x 2.0	200	50
IC11500140	138-142	5	125	140	M8/M10	196	161	88	19 x 2.0	200	50
IC11500150	148-153	-	-	150	M8/M10	206	171	93	19 x 2.0	200	50
IC11500160	159-166	-	-	160	M8/M10	216	181	98	19 x 2.0	200	50
IC11500168	168-172	6	150	168	M8/M10	224	189	102	19 x 2.0	200	50
IC11500200	200-212	-	-	200	M8/M10	256	221	118	19 x 2.0	300	50
IC11500220	215-220	8	200	220	M8/M10	276	241	128	19 x 2.0	300	40
IC11500250	249-260	-	-	250	M8/M10	306	271	143	19 x 2.0	300	40
IC11500315	313-318	-	-	315	M8/M10	371	336	176	19 x 2.0	300	25

Note: Hot-dip galvanized and stainless steel options are available on request.

PLAIN SPLIT CLAMP

A

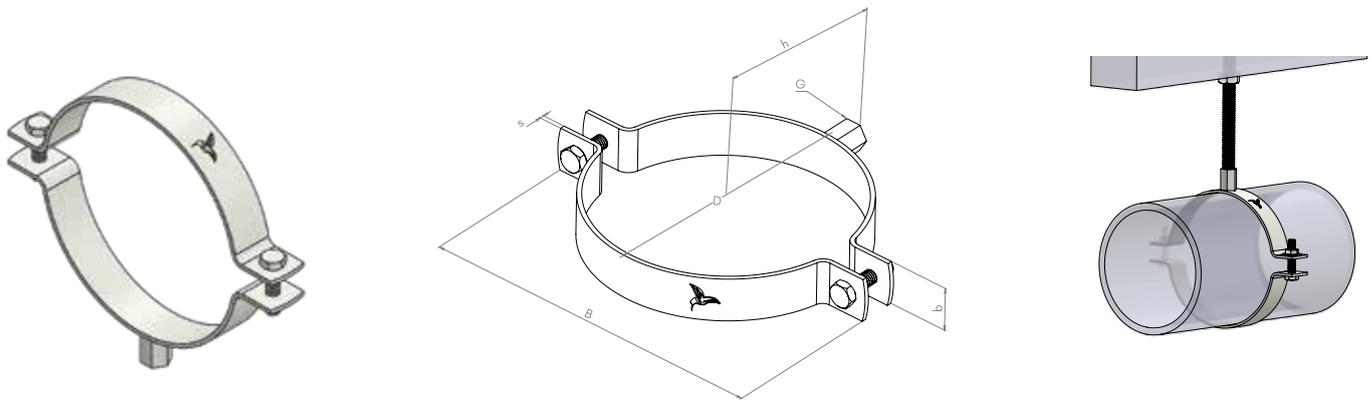

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.



Easy Installation: Large opening angle with anti-loss screws for efficient setup.

Part No.	D (mm)	Size (inch)	DN	Dia (mm)	G	B (mm)	H (mm)	h (mm)	b x s (mm)	Rec. Load KG	Qty Pack
IC12500015	15-19	3/8	10	15	M8/M10	59	30	23	20 x 2.0	200	600
IC12500022	20-25	1/2	15	22	M8/M10	66	37	26	20 x 2.0	200	500
IC12500028	26-30	3/4	20	28	M8/M10	72	43	29	20 x 2.0	200	400
IC12500035	32-36	1	25	35	M8/M10	79	50	33	20 x 2.0	200	350
IC12500042	38-43	1 1/4	32	42	M8/M10	86	57	36	20 x 2.0	200	300
IC12500048	47-51	1 1/2	40	48	M8/M10	92	63	39	20 x 2.0	200	250
IC12500054	53-58	-	-	54	M8/M10	98	69	42	20 x 2.0	200	250
IC12500060	60-64	2	50	60	M8/M10	104	75	45	20 x 2.0	200	200
IC12500063	63-66	-	-	63	M8/M10	108	82	47	20 x 2.0	200	200
IC12500070	68-72	-	-	70	M8/M10	114	85	50	20 x 2.0	200	150
IC12500075	74-80	2 1/2	65	75	M8/M10	119	90	53	20 x 2.0	200	150
IC12500083	81-86	-	-	83	M8/M10	127	98	57	20 x 2.0	200	125
IC12500090	87-92	3	80	90	M8/M10	134	105	60	20 x 2.0	200	125
IC12500100	99-105	3 1/2	-	100	M8/M10	144	115	65	20 x 2.0	200	100
IC12500110	107-112	-	-	110	M8/M10	154	125	70	20 x 2.0	200	100
IC12500115	113-118	4	100	115	M8/M10	159	130	73	20 x 2.0	200	90
IC12500125	125-130	-	-	125	M8/M10	169	140	78	20 x 2.0	200	75
IC12500133	131-137	-	-	133	M8/M10	177	148	82	20 x 2.0	200	75
IC12500140	138-142	5	125	140	M8/M10	184	155	85	20 x 2.5	300	75
IC12500150	148-153	-	-	150	M8/M10	194	165	90	20 x 2.5	300	60
IC12500160	159-166	-	-	160	M8/M10	204	175	95	25 x 2.5	300	60
IC12500168	168-172	6	150	168	M8/M10	212	183	99	25 x 2.5	300	60
IC12500200	200-212	-	-	200	M8/M10	244	215	115	25 x 2.5	300	60
IC12500220	215-220	8	200	220	M8/M10	264	235	125	25 x 2.5	300	50
IC12500250	249-260	-	-	250	M8/M10	294	265	140	25 x 2.5	300	50
IC12500315	313-318	-	-	315	M8/M10	359	330	173	25 x 2.5	300	40

Note: Hot-dip galvanized and stainless steel options are available on request.

HEAVY DUTY RUBBER LINED SPLIT CLAMP

A

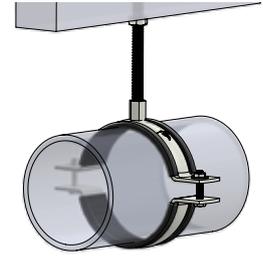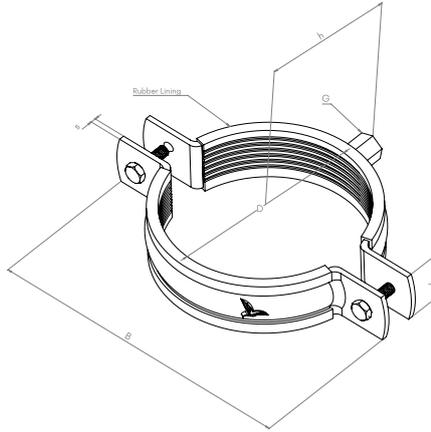

Material: Carbon Steel with EPDM Rubber Lining.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.






Part No.	D (mm)	Size (inch)	- DN	Dia (mm)	G	B (mm)	H (mm)	h (mm)	b x s (mm)	Rec. Load KG	Qty Pack
IC11501015	15-19	3/8	10	15	M8/M10	81	55	35	30 x 2.5	200	25
IC11501022	20-25	1/2	15	22	M8/M10	84	58	37	30 x 2.5	200	25
IC11501028	26-30	3/4	20	28	M8/M10	91	64	40	30 x 2.5	200	25
IC11501035	32-36	1	25	35	M8/M10	98	70	43	30 x 2.5	200	25
IC11501042	40-45	1 1/4	32	42	M8/M10	109	80	48	30 x 2.5	200	25
IC11501048	46-51	1 1/2	40	48	M8/M10	115	86	51	30 x 2.5	200	25
IC11501054	53-59	-	-	54	M8/M10	122	93	55	30 x 2.5	200	25
IC11501060	60-64	2	50	60	M8/M10	129	99	57	30 x 2.5	200	25
IC11501070	65-72	-	-	70	M10/M12	136	116	71	30 x 3.0	250	25
IC11501075	74-80	2 1/2	65	75	M10/M12	144	123	74	30 x 3.0	250	25
IC11501083	81-86	-	-	83	M10/M12	152	130	78	30 x 3.0	250	25
IC11501090	87-92	3	80	90	M10/M12	159	136	81	30 x 3.0	250	25
IC11501100	99-109	3 1/2	-	100	M10/M12	175	154	90	30 x 3.0	250	25
IC11501115	109-116	4	100	115	M10/M12	182	160	93	30 x 3.0	250	25
IC11501125	125-133	-	-	125	M10/M12	200	178	102	30 x 3.0	250	25
IC11501140	132-140	-	-	133	M10/M12	207	184	104	30 x 3.0	250	25
IC11501168	159-169	6	150	168	M12,M16	254	220	120	38 x 4.0	380	15
IC11501183	178-188	-	-	183	M12,M16	274	239	130	38 x 4.0	380	15
IC11501203	194-204	-	-	203	M12,M16	290	255	138	38 x 4.0	380	15
IC11501210	203-213	-	-	210	M12,M16	299	264	143	38 x 4.0	380	15
IC11501220	217-227	8	200	220	M12,M16	322	278	150	38 x 4.0	380	2
IC11501250	240-250	-	-	250	M16	345	302	163	38 x 4.0	380	2
IC11501273	265-275	10	250	273	M16	367	327	175	48 x 5.0	920	2
IC11501325	313-325	12	300	325	M16	414	374	198	48 x 5.0	920	2
IC11501364	354-364	14	350	364	M16	453	412	217	48 x 5.0	920	2
IC11501408	398-410	16	400	408	M16	497	456	239	48 x 5.0	920	2
IC11501458	445-460	18	450	458	M16	548	506	264	48 x 5.0	920	2
IC11501509	499-510	18	500	509	M16	557	557	289	48 x 5.0	920	2

Note: Hot-dip galvanized and stainless steel options are available on request.

HEAVY DUTY SPLIT CLAMP

A

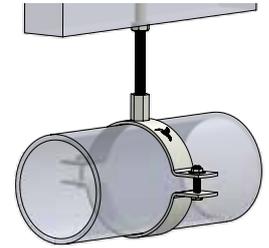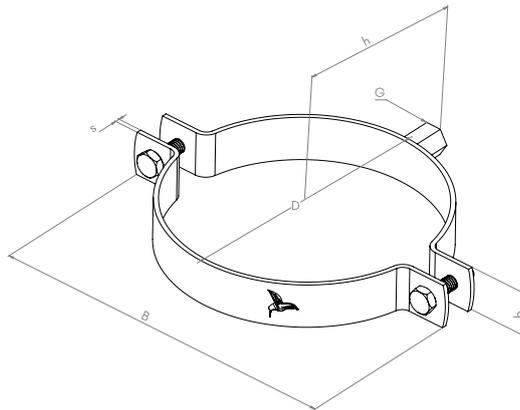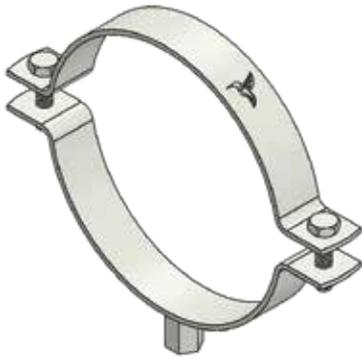

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.


Easy Installation: Large opening angle with anti-loss screws for efficient setup.

Part No.	D (mm)	Size (inch)	- DN	Dia (mm)	G	B (mm)	H (mm)	h (mm)	b x s (mm)	Rec. Load KG	Qty Pack
IC12501015	15-19	3/8	10	15	M8/M10	81	55	35	30 x 2.5	200	25
IC12501022	20-25	1/2	15	22	M8/M10	84	58	37	30 x 2.5	200	25
IC12501028	26-30	3/4	20	28	M8/M10	91	64	40	30 x 2.5	200	25
IC12501035	32-36	1	25	35	M8/M10	98	70	43	30 x 2.5	200	25
IC12501042	40-45	1 1/4	32	42	M8/M10	109	80	48	30 x 2.5	200	25
IC12501048	46-51	1 1/2	40	48	M8/M10	115	86	51	30 x 2.5	200	25
IC12501054	53-59	-	-	54	M8/M10	122	93	55	30 x 2.5	200	25
IC12501060	60-64	2	50	60	M8/M10	129	99	57	30 x 2.5	200	25
IC12501070	65-72	-	-	70	M10/M12	136	116	71	30 x 3.0	250	25
IC12501075	74-80	2 1/2	65	75	M10/M12	144	123	74	30 x 3.0	250	25
IC12501083	81-86	-	-	83	M10/M12	152	130	78	30 x 3.0	250	25
IC12501090	87-92	3	80	90	M10/M12	159	136	81	30 x 3.0	250	25
IC12501100	99-109	3 1/2	-	100	M10/M12	175	154	90	30 x 3.0	250	25
IC12501115	109-116	4	100	115	M10/M12	182	160	93	30 x 3.0	250	25
IC12501125	125-133	-	-	125	M10/M12	200	178	102	30 x 3.0	250	25
IC12501140	132-140	-	-	133	M10/M12	207	184	104	30 x 3.0	250	25
IC12501168	159-169	6	150	168	M12,M16	254	220	120	38 x 4.0	380	15
IC12501183	178-188	-	-	183	M12,M16	274	239	130	38 x 4.0	380	15
IC12501203	194-204	-	-	203	M12,M16	290	255	138	38 x 4.0	380	15
IC12501210	203-213	-	-	210	M12,M16	299	264	143	38 x 4.0	380	15
IC12501220	217-227	8	200	220	M12,M16	322	278	150	38 x 4.0	380	2
IC12501250	240-250	-	-	250	M16	345	302	163	38 x 4.0	380	2
IC12501273	265-275	10	250	273	M16	367	327	175	48 x 5.0	920	2
IC12501315	313-325	12	300	323	M16	414	374	198	48 x 5.0	920	2
IC12501315	354-364	14	350	360	M16	453	412	217	48 x 5.0	920	2
IC12501315	398-410	16	400	406	M16	497	456	239	48 x 5.0	920	2
IC12501315	445-460	18	450	460	M16	548	506	264	48 x 5.0	920	2
IC12501315	499-510	18	500	509	M16	557	557	289	48 x 5.0	920	2

Note: Hot-dip galvanized and stainless steel options are available on request.

RUBBER LINED SPRINKLER CLAMP

A

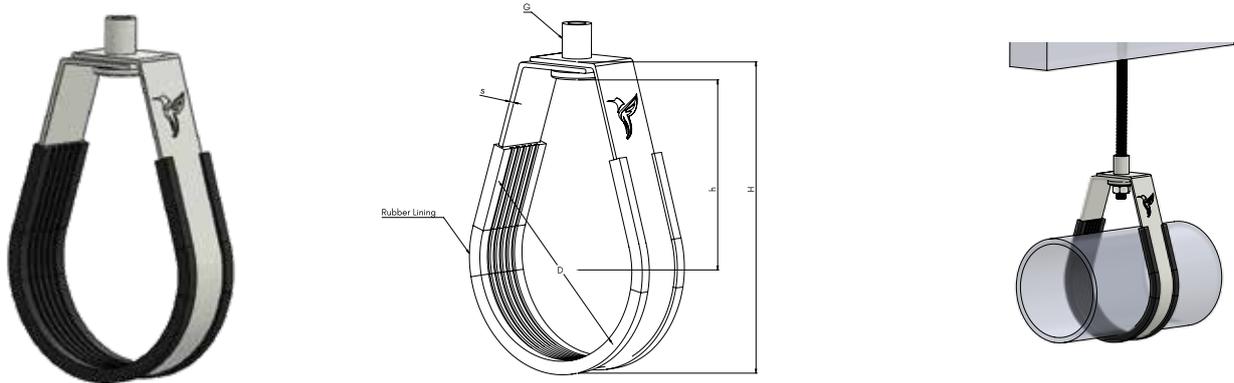

Material: Carbon Steel with EPDM Rubber Lining.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.





NOISE REDUCING
Tested in accordance with
ISO 9822-1

Part No.	D (mm)	Size (inch)	G	h (mm)	b x s (mm)	Rec. Load KG	Qty BOX
IC11503028	28	3/4	M10	61	20 x 1.5	300	400
IC11503035	35	1	M10	68	20 x 1.5	300	300
IC11503040	42	1 1/4	M10	71	20 x 1.5	300	250
IC11503048	48	1 1/2	M10	81	20 x 1.5	300	200
IC11503060	60	2	M10	100	20 x 1.5	300	180
IC11503076	73	2 1/2	M10	120	32 x 2.0	450	75
IC11503090	89	3	M10	135	32 x 2.0	450	60
IC11503100	105	3 1/2	M10	150	32 x 2.0	450	40
IC11503115	115	4	M10	165	32 x 2.5	550	40
IC11503140	140	5	M12	195	40 x 2.5	650	25
IC11503168	168	6	M12	320	40 x 3.0	750	20
IC11503219	219	8	M12	290	50 x 3.0	900	10
IC11503273	273	10	M12	315	50 x 3.0	900	8

Note: Hot-dip galvanized and stainless steel options are available on request.

SPRINKLER CLAMP

A

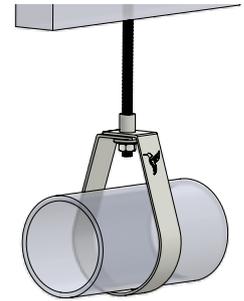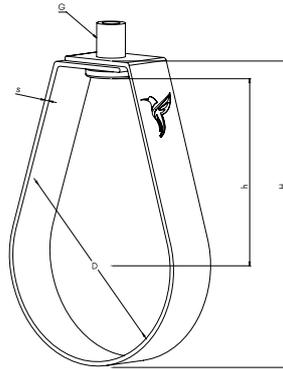

Material: Carbon Steel.
Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
 Hot Dip Galvanized (ASTM A153/EN ISO 1461)
 Armor X 20
Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.
Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.
Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.
Easy Installation: Large opening angle with anti-loss screws for efficient setup.




Part No.	D (mm)	Size (inch)	G	h (mm)	b x s (mm)	Rec. Load KG	Qty BOX
IC12503028	28	3/4	M10	61	20 x 1.5	300	400
IC12503035	35	1	M10	68	20 x 1.5	300	300
IC12503040	42	1 1/4	M10	71	20 x 1.5	300	250
IC12503048	48	1 1/2	M10	81	20 x 1.5	300	200
IC12503060	60	2	M10	100	20 x 1.5	300	180
IC12503076	73	2 1/2	M10	120	32 x 2.0	450	75
IC12503090	89	3	M10	135	32 x 2.0	450	60
IC12503100	105	3 1/2	M10	150	32 x 2.0	450	40
IC12503115	115	4	M10	165	32 x 2.5	550	40
IC12503140	140	5	M12	195	40 x 2.5	650	25
IC12503168	168	6	M12	320	40 x 3.0	750	20
IC12503219	219	8	M12	290	50 x 3.0	900	10
IC12503273	273	10	M12	315	50 x 3.0	900	8

Note: Hot-dip galvanized and stainless steel options are available on request.

P1 SERIES SPRINKLER CLAMP

A

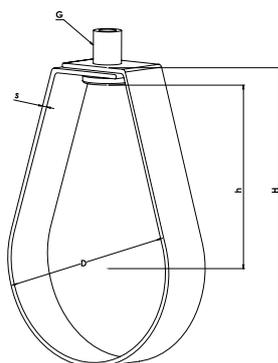

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.





Part No.	D (mm)	Size (inch)	G	h (mm)	b x s (mm)	Rec. Load KG	Qty BOX	Approval
S-050	21.4	1/2	M10	61	16 x 1.2	300	300	UL/FM
S-075	26.7	3/4	M10	61	16 x 1.2	300	200	UL/FM
S-100	33.4	1	M10	68	16 x 1.2	300	200	UL/FM
S-125	42.2	1 1/4	M10	71	16 x 1.2	300	150	UL/FM
S-150	48.3	1 1/2	M10	81	16 x 1.2	300	100	UL/FM
S-200	60.4	2	M10	100	16 x 1.2	300	100	UL/FM
S-250	73.1	2 1/2	M10	120	22 x 1.5	450	60	UL/FM
S-300	88.9	3	M10	135	22 x 1.5	450	40	UL/FM
S-350	101.6	3 1/2	M10	150	22 x 1.5	450	35	UL/FM
S-400	114.3	4	M10	165	22 x 1.5	550	30	UL/FM
S-500	141.3	5	M12	195	19 x 2.5	650	25	UL/FM
S-600	168.3	6	M12	320	19 x 2.5	750	20	UL/FM
S-800	219.1	8	M12	290	19/25 x 2.5	900	40	FM

The P1 series of FM/UL-approved Sprinkler Clamps (Swivel Band Hangers, Model S) is manufactured in China.

Note: Hot-dip galvanized and stainless steel options are available on request.

RUBBER LINED CLEVIS HANGER

A

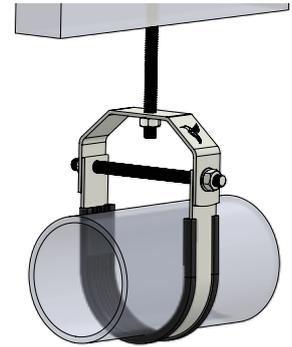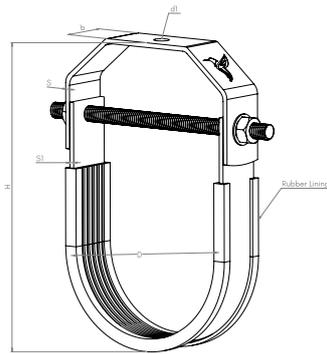

Material: Carbon Steel with EPDM Rubber Lining.
Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
 Hot Dip Galvanized (ASTM A153/EN ISO 1461)
 Armor X 20
Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.
Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.
Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.
Easy Installation: Large opening angle with anti-loss screws for efficient setup.



NOISE REDUCING




 Tested in accordance with
 ISO 3822-1

Part No.	D (mm)	Size (inch)	BOLT (mm)	H (mm)	b (mm)	s (mm)	sl (mm)	d1 (mm)	Rec. Load KG	Qty BOX
IC11504022	22	1/2	M8 x 60	73	25	3.00	3.00	10	400	125
IC11504028	28	3/4	M8 x 68	79	25	3.00	3.00	10	400	125
IC11504035	35	1	M8 x 78	85	25	3.00	3.00	10	400	125
IC11504040	40	1 1/4	M8 x 82	95	25	3.00	3.00	10	400	125
IC11504048	48	1 1/2	M8 x 88	103	25	3.00	3.00	10	400	100
IC11504060	60	2	M10 x 110	120	25	3.00	3.00	10	400	75
IC11504073	73	2 1/2	M10 x 125	149	25	4.00	4.00	10	650	60
IC11504089	89	3	M10 x 140	176	25	4.00	4.00	10	650	50
IC11504105	105	3 1/2	M10 x 155	176	25	4.00	4.00	10	650	40
IC11504115	115	4	M10 x 170	201	32	6.00	6.00	10	800	20
IC11504140	140	5	M12 x 195	235	32	6.00	6.00	12	800	15
IC11504168	168	6	M12 x 225	269	40	6.00	6.00	12	1100	10
IC11504219	219	8	M12 x 275	341	40	6.00	6.00	12	1100	15
IC11504273	273	10	M16 x 360	422	40	6.00	6.00	16	1100	10
IC11504323	323	12	M20 x 420	493	50	9.00	6.00	20	1500	6
IC11504355	355	14	M20 x 455	559	50	9.00	6.00	20	1500	6
IC11504406	406	16	M24 x 510	613	65	12.00	6.00	24	1750	3
IC11504457	457	18	M24 x 555	678	65	12.00	6.00	24	1750	3
IC11504508	508	20	M24 x 610	718	75	12.00	9.00	30	2200	2
IC11504610	610	24	M24 x 710	853	75	16.00	9.00	30	2700	2
IC11504755	755	30	M24 x 890	998	75	19.00	9.00	30	3000	1

Note: Hot-dip galvanized and stainless steel options are available on request.

CLEVIS HANGER

A

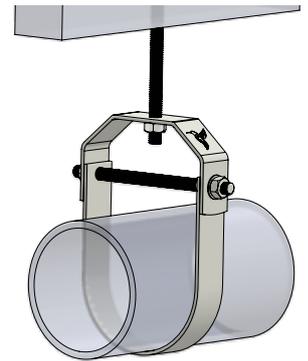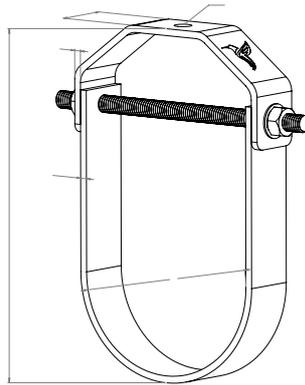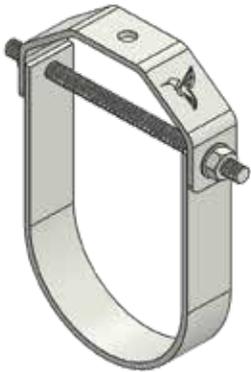

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)

Hot Dip Galvanized (ASTM A153/EN ISO 1461)

Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.




Part No.	D (mm)	Size (inch)	BOLT (mm)	H (mm)	b (mm)	s (mm)	s1 (mm)	d1 (mm)	Rec. Load KG	Qty BOX
IC12504022	22	1/2	M8 x 60	73	25	3.00	3.00	10	400	125
IC12504028	28	3/4	M8 x 68	79	25	3.00	3.00	10	400	125
IC12504035	35	1	M8 x 78	85	25	3.00	3.00	10	400	125
IC12504040	40	1 1/4	M8 x 82	95	25	3.00	3.00	10	400	125
IC12504048	48	1 1/2	M8 x 88	103	25	3.00	3.00	10	400	100
IC12504060	60	2	M10 x 110	120	25	3.00	3.00	10	400	75
IC12504073	73	2 1/2	M10 x 125	149	25	4.00	4.00	10	650	60
IC12504089	89	3	M10 x 140	176	25	4.00	4.00	10	650	50
IC12504105	105	3 1/2	M10 x 155	176	25	4.00	4.00	10	650	40
IC12504115	115	4	M10 x 170	201	32	6.00	6.00	10	800	20
IC12504140	140	5	M12 x 195	235	32	6.00	6.00	12	800	15
IC12504168	168	6	M12 x 225	269	40	6.00	6.00	12	1100	10
IC12504219	219	8	M12 x 275	341	40	6.00	6.00	12	1100	15
IC12504273	273	10	M16 x 360	422	40	6.00	6.00	16	1100	10
IC12504323	323	12	M20 x 420	493	50	9.00	6.00	20	1500	6
IC12504355	355	14	M20 x 455	559	50	9.00	6.00	20	1500	6
IC12504406	406	16	M24 x 510	613	65	12.00	6.00	24	1750	3
IC12504457	457	18	M24 x 555	678	65	12.00	6.00	24	1750	3
IC12504508	508	20	M24 x 610	718	75	12.00	9.00	30	2200	2
IC12504610	610	24	M24 x 710	853	75	16.00	9.00	30	2700	2
IC12504755	755	30	M24 x 890	998	75	19.00	9.00	30	3000	1

Note: Hot-dip galvanized and stainless steel options are available on request.

CLEVIS HANGER HDCH SERIES

A

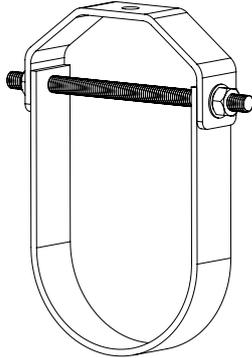

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.





Part No.	D (mm)	Size (inch)	BOLT (mm)	H (mm)	b (mm)	s (mm)	s1 (mm)	d1 (mm)	Rec. Load KG	Qty BOX
HDCH-050	22	1/2	M8 x 60	73	25	3.00	3.00	10	400	125
HDCH-075	28	3/4	M8 x 68	79	25	3.00	3.00	10	400	125
HDCH-100	35	1	M8 x 78	85	25	3.00	3.00	10	400	125
HDCH-125	40	1 1/4	M8 x 82	95	25	3.00	3.00	10	400	125
HDCH-150	48	1 1/2	M8 x 88	103	25	3.00	3.00	10	400	100
HDCH-200	60	2	M10 x 110	120	25	3.00	3.00	10	400	75
HDCH-250	73	2 1/2	M10 x 125	149	25	4.00	4.00	10	650	60
HDCH-300	89	3	M10 x 140	176	25	4.00	4.00	10	650	50
HDCH-350	105	3 1/2	M10 x 155	176	25	4.00	4.00	10	650	40
HDCH-400	115	4	M10 x 170	201	32	6.00	6.00	10	800	20
HDCH-500	140	5	M12 x 195	235	32	6.00	6.00	12	800	15
HDCH-600	168	6	M12 x 225	269	40	6.00	6.00	12	1100	10

The HDCH series of FM/UL-approved Clevis Hanger Clamps (Swivel Band Hangers, Model S) is manufactured in China.

Note: Hot-dip galvanized and stainless steel options are available on request.

RUBBER LINED U STRAP

A

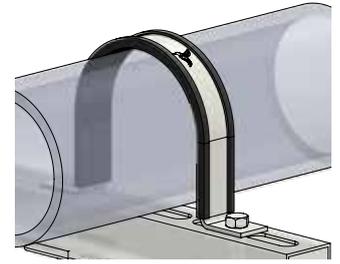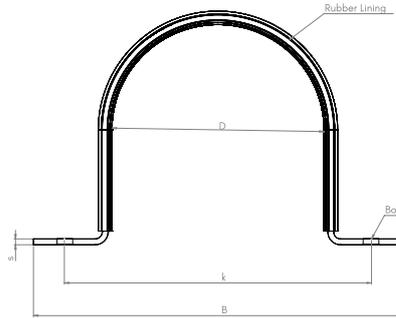

Material: Carbon Steel with EPDM Rubber Lining.
Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
 Hot Dip Galvanized (ASTM A153/EN ISO 1461)
 Armor X 20
Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.
Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.
Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.
Easy Installation: Large opening angle with anti-loss screws for efficient setup.





Part No.	D (mm)	Size (inch)	BOLT (mm)	B (mm)	b x s (mm)	k (mm)	Rec. Load KG	Qty Pack
IC11505022	22	1/2	M8	79	25 x 2.0	54.00	550	500
IC11505028	28	3/4	M8	85	25 x 2.0	60.00	550	400
IC11505035	35	1	M8	92	25 x 2.0	67.00	550	400
IC11505040	40	1 1/4	M8	99	25 x 2.0	74.00	550	350
IC11505048	48	1 1/2	M8	105	25 x 2.0	80.00	550	300
IC11505054	54	-	M8	111	25 x 2.0	86.00	550	250
IC11505060	60	2	M8	117	25 x 2.0	92.00	550	200
IC11505067	67	-	M8	124	25 x 2.0	99.00	550	200
IC11505075	75	2 1/2	M8	148	25 x 3.0	116.00	650	150
IC11505082	82	-	M8	155	25 x 3.0	123.00	650	150
IC11505090	90	3	M8	163	25 x 3.0	131.00	650	150
IC115050100	100	3 1/2	M8	173	25 x 3.0	141.00	650	150
IC11505108	108	-	M8	181	25 x 3.0	149.00	650	125
IC11505115	115	4	M8	188	25 x 3.0	156.00	650	125
IC11505126	126	-	M10	199	25 x 3.0	167.00	650	125
IC11505140	140	5	M10	213	25 x 3.0	181.00	650	100
IC11505148	148	-	M10	221	25 x 3.0	189.00	650	100
IC11505155	155	-	M10	228	25 x 3.0	196.00	650	100
IC11505168	168	6	M10	240	25 x 3.0	208.00	650	100
IC11505179	179	-	M10	252	25 x 3.0	220.00	650	100
IC11505190	190	-	M10	263	38 x 3.0	231.00	900	50
IC11505205	205	-	M10	278	38 x 3.0	246.00	900	50
IC11505219	219	8	M10	292	38 x 3.0	260.00	900	50
IC11505230	230	-	M10	303	38 x 3.0	271.00	900	30

Note: Hot-dip galvanized and stainless steel options are available on request.

RUBBER LINED U STRAP

A

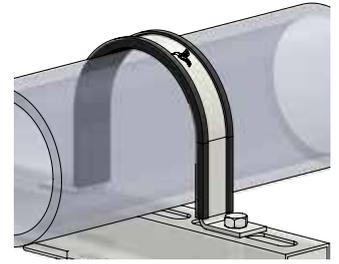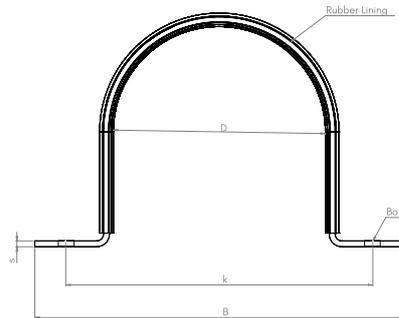

Material: Carbon Steel with EPDM Rubber Lining.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.





Part No.	D (mm)	Size (inch)	BOLT (mm)	B (mm)	b x s (mm)	k (mm)	Rec. Load KG	Qty Pack
IC11505241	241	-	M12	335	38 x 4.0	294	1350	35
IC11505263	263	-	M12	357	38 x 4.0	316	1350	35
IC11505273	273	10	M18	367	38 x 4.0	326	1350	35
IC11505295	295	-	M18	389	38 x 4.0	348	1350	30
IC11505323	323	12	M18	417	38 x 4.0	376	1350	30
IC11505356	256	14	M18	450	50 x 4.0	409	1900	20
IC11505374	374	-	M18	468	50 x 4.0	427	1900	15
IC11505406	406	16	M18	500	50 x 4.0	459	1900	15
IC11505432	432	-	M18	526	50 x 4.0	485	1900	15
IC11505456	456	18	M18	550	50 x 4.0	509	1900	10
IC11505482	482	-	M18	576	50 x 4.0	535	1900	10
IC11505508	508	20	M18	602	50 x 4.0	561	1900	10
IC11505533	533	-	M18	627	50 x 4.0	586	1900	10
IC11505559	559	-	M18	653	50 x 4.0	612	1900	10
IC11505583	583	-	M18	677	50 x 4.0	636	1900	10
IC11505610	610	24	M18	704	60 x 4.0	663	1900	10
IC11505658	658	-	M18	769	50 x 6.0	721	2400	5
IC11505690	690	-	M18	801	50 x 6.0	753	2400	5
IC11505760	760	-	M18	870	50 x 6.0	823	2400	5
IC11505863	863	-	M18	974	50 x 6.0	926	2400	5
IC11505918	918	-	M18	1029	50 x 6.0	981	2400	5

Note: Hot-dip galvanized and stainless steel options are available on request.

U STRAP

A

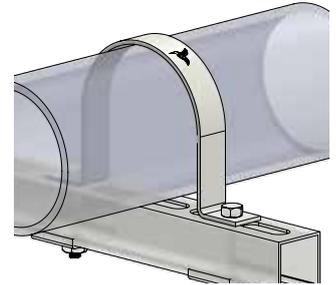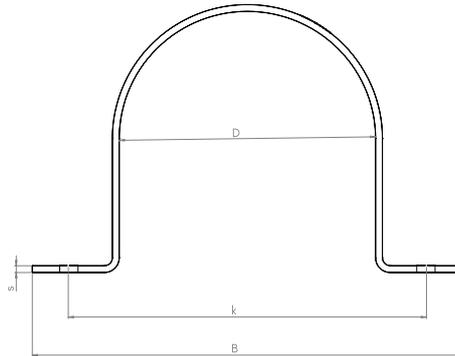

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.





Part No.	D (mm)	Size (inch)	BOLT (mm)	B (mm)	b x s (mm)	k (mm)	Rec. Load KG	Qty Pack
IC12505022	22	1/2	M8	79	25 x 2.0	54.00	550	500
IC12505028	28	3/4	M8	85	25 x 2.0	60.00	550	400
IC12505035	35	1	M8	92	25 x 2.0	67.00	550	400
IC12505040	40	1 1/4	M8	99	25 x 2.0	74.00	550	350
IC12505048	48	1 1/2	M8	105	25 x 2.0	80.00	550	300
IC12505054	54	-	M8	111	25 x 2.0	86.00	550	250
IC12505060	60	2	M8	117	25 x 2.0	92.00	550	200
IC12505067	67	-	M8	124	25 x 2.0	99.00	550	200
IC12505075	75	2 1/2	M8	148	25 x 3.0	116.00	650	150
IC12505082	82	-	M8	155	25 x 3.0	123.00	650	150
IC12505090	90	3	M8	163	25 x 3.0	131.00	650	150
IC125050100	100	3 1/2	M8	173	25 x 3.0	141.00	650	150
IC125050108	108	-	M8	181	25 x 3.0	149.00	650	125
IC125050115	115	4	M8	188	25 x 3.0	156.00	650	125
IC125050126	126	-	M10	199	25 x 3.0	167.00	650	125
IC125050140	140	5	M10	213	25 x 3.0	181.00	650	100
IC125050148	148	-	M10	221	25 x 3.0	189.00	650	100
IC125050155	155	-	M10	228	25 x 3.0	196.00	650	100
IC125050168	168	6	M10	240	25 x 3.0	208.00	650	100
IC125050179	179	-	M10	252	25 x 3.0	220.00	650	100
IC125050190	190	-	M10	263	38 x 3.0	231.00	900	50
IC125050205	205	-	M10	278	38 x 3.0	246.00	900	50
IC125050219	219	8	M10	292	38 x 3.0	260.00	900	50
IC125050230	230	-	M10	303	38 x 3.0	271.00	900	30

Note: Hot-dip galvanized and stainless steel options are available on request.

U STRAP

A

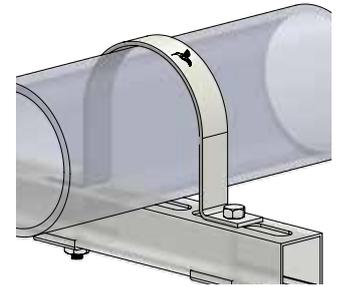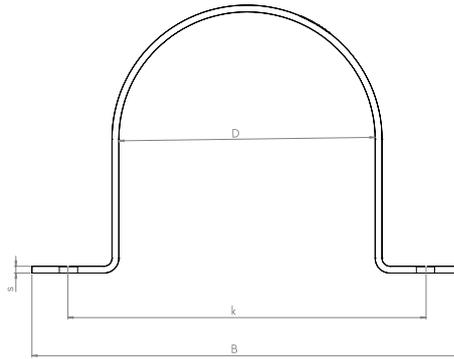

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.



Easy Installation: Large opening angle with anti-loss screws for efficient setup.

Part No.	D (mm)	Size (inch)	BOLT (mm)	B (mm)	b x s (mm)	k (mm)	Rec. Load KG	Qty Pack
IC12505241	241	-	M12	335	38 x 4.0	294	1350	35
IC12505263	263	-	M12	357	38 x 4.0	316	1350	35
IC12505273	273	10	M18	367	38 x 4.0	326	1350	35
IC12505295	295	-	M18	389	38 x 4.0	348	1350	30
IC12505323	323	12	M18	417	38 x 4.0	376	1350	30
IC12505356	256	14	M18	450	50 x 4.0	409	1900	20
IC12505374	374	-	M18	468	50 x 4.0	427	1900	15
IC12505406	406	16	M18	500	50 x 4.0	459	1900	15
IC12505432	432	-	M18	526	50 x 4.0	485	1900	15
IC12505456	456	18	M18	550	50 x 4.0	509	1900	10
IC12505482	482	-	M18	576	50 x 4.0	535	1900	10
IC12505508	508	20	M18	602	50 x 4.0	561	1900	10
IC12505533	533	-	M18	627	50 x 4.0	586	1900	10
IC12505559	559	-	M18	653	50 x 4.0	612	1900	10
IC12505583	583	-	M18	677	50 x 4.0	636	1900	10
IC12505610	610	24	M18	704	60 x 4.0	663	1900	10
IC12505658	658	-	M18	769	50 x 6.0	721	2400	5
IC12505690	690	-	M18	801	50 x 6.0	753	2400	5
IC12505760	760	-	M18	870	50 x 6.0	823	2400	5
IC12505863	863	-	M18	974	50 x 6.0	926	2400	5
IC12505918	918	-	M18	1029	50 x 6.0	981	2400	5

Note: Hot-dip galvanized and stainless steel options are available on request.

RUBBER LINED TWO BOLT CLAMP

A

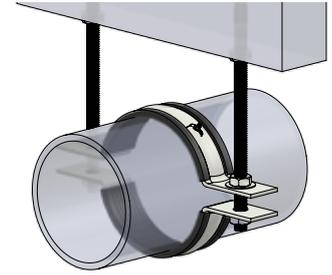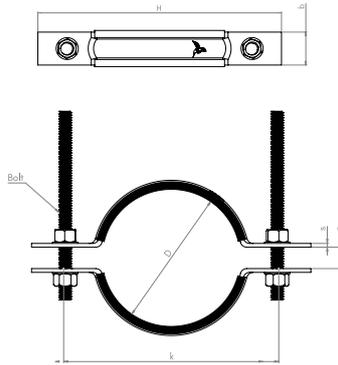

Material: Carbon Steel with EPDM Rubber Lining.
Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
 Hot Dip Galvanized (ASTM A153/EN ISO 1461)
 Armor X 20
Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.
Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.
Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.
Easy Installation: Large opening angle with anti-loss screws for efficient setup.






Part No.	D (mm)	Size (inch)	BOLT (mm)	H (mm)	b x s (mm)	k (mm)	C (mm)	Rec. Load KG	Qty Pack
IC11506022	22	1/2	M10	97	25 x 5.0	68	12	170	60
IC11506028	28	3/4	M10	105	25 x 5.0	76	12	170	60
IC11506035	35	1	M10	113	25 x 5.0	84	12	170	50
IC11506040	40	1 1/4	M10	121	25 x 5.0	92	12	170	50
IC11506048	48	1 1/2	M10	127	25 x 5.0	98	12	170	40
IC11506060	60	2	M10	156	25 x 5.0	116	16	170	35
IC11506075	75	2 1/2	M12	182	25 x 6.0	142	16	400	35
IC11506090	90	3	M12	196	25 x 6.0	156	16	400	30
IC11506100	100	3 1/2	M12	208	25 x 6.0	168	16	400	30
IC11506115	115	4	M12	220	25 x 6.0	180	19	400	25
IC11506140	140	5	M16	252	40 x 6.0	214	19	600	20
IC11506168	168	6	M16	290	40 x 6.0	242	22	600	15
IC11506220	220	8	M16	352	40 x 6.0	152	25	1100	10
IC11506273	273	10	M16	406	50 x 9.0	358	25	1200	5
IC11506323	323	12	M20	490	50 x 12.0	430	25	1500	4
IC11506355	355	14	M20	546	50 x 12.0	480	28	1500	4
IC11506406	406	16	M20	597	60 x 16.0	532	28	2200	2
IC11506457	457	18	M20	686	60 x 16.0	610	32	2200	2
IC11506508	508	20	M20	776	60 x 16.0	680	35	2200	1
IC11506610	610	24	M20	876	60 x 16.0	780	42	2200	1

Note: Hot-dip galvanized and stainless steel options are available on request.

TWO BOLT CLAMP

A

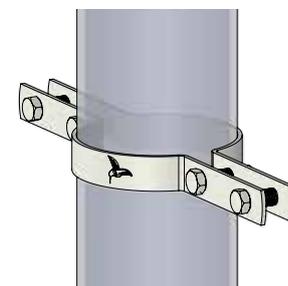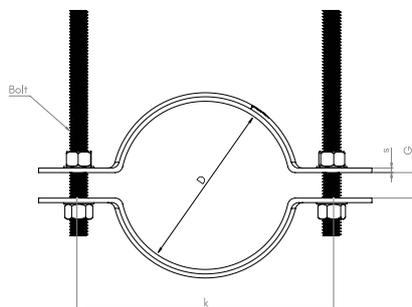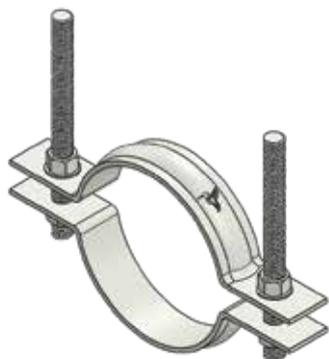

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.



Easy Installation: Large opening angle with anti-loss screws for efficient setup.

Part No.	D (mm)	Size (inch)	BOLT (mm)	H (mm)	b x s (mm)	k (mm)	C (mm)	Rec. Load KG	Qty Pack
IC12506022	22	1/2	M10	97	25 x 5.0	68	12	170	60
IC12506028	28	3/4	M10	105	25 x 5.0	76	12	170	60
IC12506035	35	1	M10	113	25 x 5.0	84	12	170	50
IC12506040	40	1 1/4	M10	121	25 x 5.0	92	12	170	50
IC12506048	48	1 1/2	M10	127	25 x 5.0	98	12	170	40
IC12506060	60	2	M10	156	25 x 5.0	116	16	170	35
IC12506075	75	2 1/2	M12	182	25 x 6.0	142	16	400	35
IC12506090	90	3	M12	196	25 x 6.0	156	16	400	30
IC12506100	100	3 1/2	M12	208	25 x 6.0	168	16	400	30
IC12506115	115	4	M12	220	25 x 6.0	180	19	400	25
IC12506140	140	5	M16	252	40 x 6.0	214	19	600	20
IC12506168	168	6	M16	290	40 x 6.0	242	22	600	15
IC12506220	220	8	M16	352	40 x 6.0	152	25	1100	10
IC12506273	273	10	M16	406	50 x 9.0	358	25	1200	5
IC12506323	323	12	M20	490	50 x 12.0	430	25	1500	4
IC12506355	355	14	M20	546	50 x 12.0	480	28	1500	4
IC12506406	406	16	M20	597	60 x 16.0	532	28	2200	2
IC12506457	457	18	M20	686	60 x 16.0	610	32	2200	2
IC12506508	508	20	M20	776	60 x 16.0	680	35	2200	1
IC12506610	610	24	M20	876	60 x 16.0	780	42	2200	1

Note: Hot-dip galvanized and stainless steel options are available on request.

RUBBER LINED RISER CLAMP

A

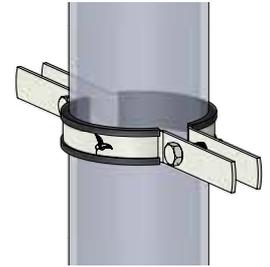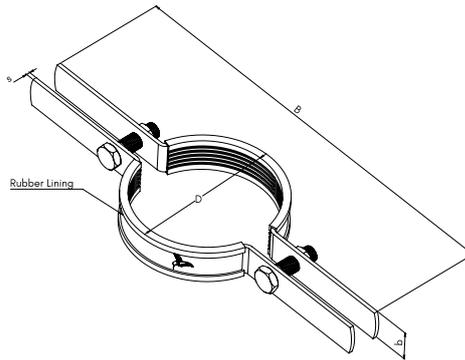

Material: Carbon Steel with EPDM Rubber Lining.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.





Part No.	D (mm)	Size (inch)	BOLT (mm)	B (mm)	b x s (mm)	Rec. Load KG	Qty Pack
IC11507022	22	1/2	M10	205	25 x 5.0	170	60
IC11507028	28	3/4	M10	215	25 x 5.0	170	60
IC11507035	35	1	M10	235	25 x 5.0	170	50
IC11507040	40	1 1/4	M10	265	25 x 5.0	170	50
IC11507048	48	1 1/2	M10	265	25 x 5.0	170	40
IC11507060	60	2	M10	265	25 x 5.0	170	35
IC11507075	75	2 1/2	M12	295	25 x 6.0	400	35
IC11507090	90	3	M12	295	25 x 6.0	400	30
IC11507100	100	3 1/2	M12	335	25 x 6.0	400	30
IC11507115	115	4	M12	335	25 x 6.0	400	25
IC11507140	140	5	M16	335	40 x 6.0	600	20
IC11507168	168	6	M16	385	40 x 6.0	600	15
IC11507220	220	8	M16	475	40 x 10.0	1100	10
IC11507273	273	10	M16	525	50 x 10.0	1200	5
IC11507323	323	12	M20	585	50 x 12.0	1500	4
IC11507355	355	14	M20	615	50 x 12.0	1500	4
IC11507406	406	16	M20	665	60 x 16.0	2200	2
IC11507457	457	18	M20	715	60 x 16.0	2200	2
IC11507508	508	20	M20	765	60 x 16.0	2200	1
IC11507610	610	24	M20	885	60 x 16.0	2200	1

Note: Hot-dip galvanized and stainless steel options are available on request.

RISER CLAMP

A

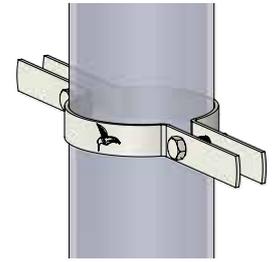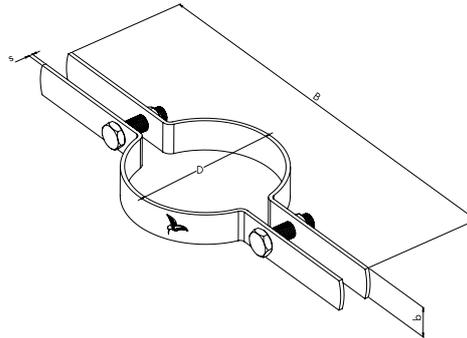

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.




Easy Installation: Large opening angle with anti-loss screws for efficient setup.

Part No.	D (mm)	Size (inch)	BOLT (mm)	B (mm)	b x s (mm)	Rec. Load KG	Qty Pack
IC12507022	22	1/2	M10	205	25 x 5.0	170	60
IC12507028	28	3/4	M10	215	25 x 5.0	170	60
IC12507035	35	1	M10	235	25 x 5.0	170	50
IC12507040	40	1 1/4	M10	265	25 x 5.0	170	50
IC12507048	48	1 1/2	M10	265	25 x 5.0	170	40
IC12507060	60	2	M10	265	25 x 5.0	170	35
IC12507075	75	2 1/2	M12	295	25 x 6.0	400	35
IC12507090	90	3	M12	295	25 x 6.0	400	30
IC12507100	100	3 1/2	M12	335	25 x 6.0	400	30
IC12507115	115	4	M12	335	25 x 6.0	400	25
IC12507140	140	5	M16	335	40 x 6.0	600	20
IC12507168	168	6	M16	385	40 x 6.0	600	15
IC12507220	220	8	M16	475	40 x 10.0	1100	10
IC12507273	273	10	M16	525	50 x 10.0	1200	5
IC12507323	323	12	M20	585	50 x 12.0	1500	4
IC12507355	355	14	M20	615	50 x 12.0	1500	4
IC12507406	406	16	M20	665	60 x 16.0	2200	2
IC12507457	457	18	M20	715	60 x 16.0	2200	2
IC12507508	508	20	M20	765	60 x 16.0	2200	1
IC12507610	610	24	M20	885	60 x 16.0	2200	1

Note: Hot-dip galvanized and stainless steel options are available on request.

TWO BOLT RISER CLAMP

A

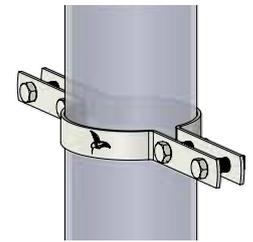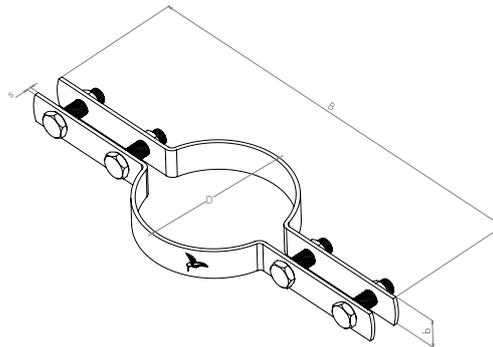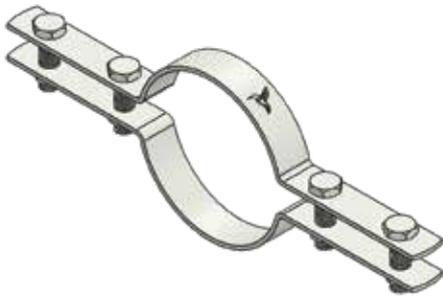

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.


Easy Installation: Large opening angle with anti-loss screws for efficient setup.

Part No.	D (mm)	Size (inch)	BOLT (mm)	B (mm)	b x s (mm)	Rec. Load KG	Qty Pack
IC12508022	22	1/2	M10	205	25 x 5.0	170	60
IC12508028	28	3/4	M10	215	25 x 5.0	170	60
IC12508035	35	1	M10	235	25 x 5.0	170	50
IC12508040	40	1 1/4	M10	265	25 x 5.0	170	50
IC12508048	48	1 1/2	M10	265	25 x 5.0	170	40
IC12508060	60	2	M10	265	25 x 5.0	170	35
IC12508075	75	2 1/2	M12	295	25 x 6.0	400	35
IC12508090	90	3	M12	295	25 x 6.0	400	30
IC12508100	100	3 1/2	M12	335	25 x 6.0	400	30
IC12508115	115	4	M12	335	25 x 6.0	400	25
IC12508140	140	5	M16	335	40 x 6.0	600	20
IC12508168	168	6	M16	385	40 x 6.0	600	15
IC12508220	220	8	M16	475	40 x 10.0	1100	10
IC12508273	273	10	M16	525	50 x 10.0	1200	5
IC12508323	323	12	M20	585	50 x 12.0	1500	4
IC12508355	355	14	M20	615	50 x 12.0	1500	4
IC12508406	406	16	M20	665	60 x 16.0	2200	2
IC12508457	457	18	M20	715	60 x 16.0	2200	2
IC12508508	508	20	M20	765	60 x 16.0	2200	1
IC12508610	610	24	M20	885	60 x 16.0	2200	1

Note: Hot-dip galvanized and stainless steel options are available on request.

RUBBER LINED U BOLT CLAMP

A

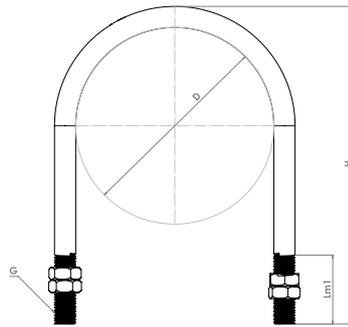

Material: Carbon Steel with EPDM Rubber Lining.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.




Part No.	D (mm)	Size (inch)	ROD (mm)	H (mm)	Lm1 (mm)	Rec. Load KG	Qty Pack
IC11509022	21	1/2	M10	79	25 x 2.0	600	250
IC11509028	27	3/4	M10	85	25 x 2.0	600	200
IC11509035	34	1	M10	92	25 x 2.0	600	200
IC11509042	43	1 1/4	M10	99	25 x 2.0	600	175
IC11509048	48	1 1/2	M10	105	25 x 2.0	600	150
IC11509060	60	2	M10	111	25 x 2.0	600	150
IC11509075	76	2 1/2	M12	117	25 x 2.0	1000	100
IC11509090	89	3	M12	124	25 x 2.0	1000	75
IC11509115	115	4	M12	148	25 x 3.0	1000	75
IC11509140	140	5	M12	155	25 x 3.0	1000	70
IC11509168	168	6	M12	163	25 x 3.0	1000	50
IC115090219	219	8	M16	173	25 x 3.0	2000	20
IC11509273	273	10	M20	181	25 x 3.0	3250	10
IC11509324	324	12	M20	188	25 x 3.0	3250	10
IC11509356	356	14	M20	199	25 x 3.0	3250	10
IC11509406	406	16	M20	213	25 x 3.0	3250	10
IC115091457	457	18	M24	221	25 x 3.0	4500	5
IC11509508	508	20	M24	228	25 x 3.0	4500	5
IC11509610	610	24	M24	240	25 x 3.0	4500	5

Note: Hot-dip galvanized and stainless steel options are available on request.

U BOLT CLAMP

A

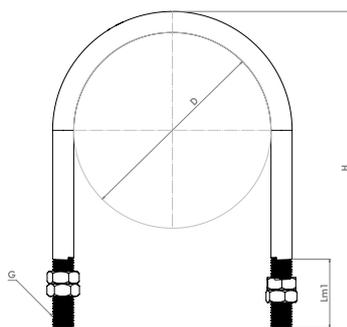

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.



Easy Installation: Large opening angle with anti-loss screws for efficient setup.

Part No.	D (mm)	Size (inch)	ROD (mm)	H (mm)	Lm1 (mm)	Rec. Load KG	Qty Pack
IC11509022	21	1/2	M10	79	25 x 2.0	600	250
IC11509028	27	3/4	M10	85	25 x 2.0	600	200
IC11509035	34	1	M10	92	25 x 2.0	600	200
IC11509042	43	1 1/4	M10	99	25 x 2.0	600	175
IC11509048	48	1 1/2	M10	105	25 x 2.0	600	150
IC11509060	60	2	M10	111	25 x 2.0	600	150
IC11509075	76	2 1/2	M12	117	25 x 2.0	1000	100
IC11509090	89	3	M12	124	25 x 2.0	1000	75
IC11509115	115	4	M12	148	25 x 3.0	1000	75
IC11509140	140	5	M12	155	25 x 3.0	1000	70
IC11509168	168	6	M12	163	25 x 3.0	1000	50
IC115090219	219	8	M16	173	25 x 3.0	2000	20
IC11509273	273	10	M20	181	25 x 3.0	3250	10
IC11509324	324	12	M20	188	25 x 3.0	3250	10
IC11509356	356	14	M20	199	25 x 3.0	3250	10
IC11509406	406	16	M20	213	25 x 3.0	3250	10
IC115091457	457	18	M24	221	25 x 3.0	4500	5
IC11509508	508	20	M24	228	25 x 3.0	4500	5
IC11509610	610	24	M24	240	25 x 3.0	4500	5

Note: Hot-dip galvanized and stainless steel options are available on request.

CONDUIT PIPE CLAMP

A

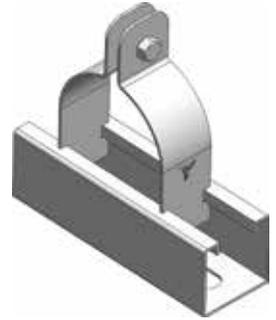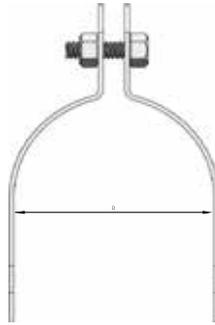

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.

Part No.	Size (inch)	D (mm)	Rec. Load KG	Qty Pack
IC12502006	1/4"	6.5	200	450
IC12502009	3/8"	9.52	200	400
IC12502012	1/2"	12.75 - 13.7	200	350
IC12502014	-	14.73 - 15.5	200	350
IC12502016	5/8"	16	200	300
IC12502017	-	17.28	200	300
IC12502018	-	18	200	300
IC12502019	3/4"	19	200	300
IC12502021	-	21.6 - 22.4	200	300
IC12502022	7/8"	22.2	200	250
IC12502023	-	23.4	200	250
IC12502025	1"	25.4	200	220
IC12502027	-	27.5 - 29	200	175
IC12502029	-	29.5 - 31.8	200	150
IC12502032	1-1/4"	32.76	270	150
IC12502033	-	33.8 - 35	270	150
IC12502037	-	36 - 37.5	270	150
IC12502038	1-1/2"	38	270	125
IC12502041	-	40 - 42	270	125
IC12502042	-	43 - 45	270	100
IC12502048	-	47.5 - 48	270	90
IC12502050	2"	50.3 - 52.5	360	90
IC12502054	-	54 - 55.5	360	80

Note: Hot-dip galvanized and stainless steel options are available on request.

SUSPENDED PIPE CLAMP

A



Material: Carbon Steel with EPDM Rubber Lining.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.

NOISE REDUCING





Tested in accordance with ISO 9822-1

Part No.	Nominal Diameter (DN)	D (mm)	Bolt Spec	Design Load (kN)
IC125010865	DN65	63.5	M12	9.5
IC12501080	DN80	76.1	M12	9.5
IC12501180	DN80	88.9	M12	9.5
IC12501100	DN100	108	M12	9.5
IC12501125	DN125	140	M12	9.5
IC12501150	DN150	168	M12	9.5

Note: Hot-dip galvanized and stainless steel options are available on request.

C-TYPE STEEL BEAM CLAMP

A

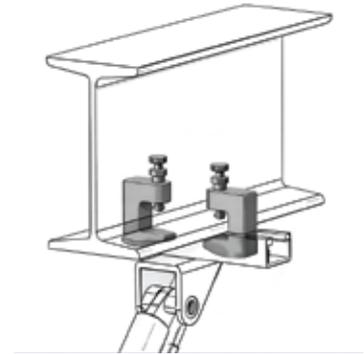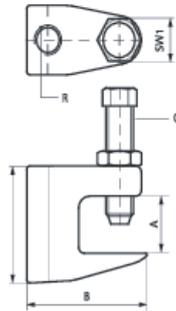

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.


Easy Installation: Large opening angle with anti-loss screws for efficient setup.

Part No.	A (mm)	R	G	H (mm)	SW1 (mm)	F _{a,z} (N)	Pack
6003206	23	M6	M10	45	17	2,500	50
6003208	23	M8	M8	35	13	2,500	50
6003010	20	M10	M10	42	17	2,500	50
6003012	26	M12	M10	54	17	3,500	50
6003016	28	M16	M12	58	19	5,500	50

Note: Hot-dip galvanized and stainless steel options are available on request.

UNIVERSAL PIPE CLAMP

A

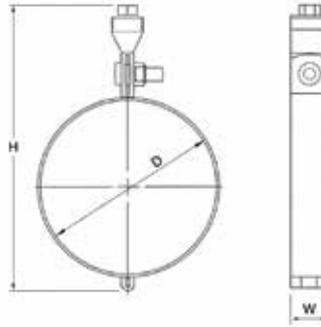

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.

Part No.	DN (A)	Inch	D (mm)	H (mm)	W (mm)	Thread Size
6003206	15	1/2"	21	87	25	M10
6003206	20	3/4"	27	93	25	M10
6003206	25	1"	34	100	25	M10
6003206	32	1-1/4"	42	108	25	M10
6003206	40	1-1/2"	49	115	25	M10
6003206	50	2"	60	126	25	M10
6003206	125	5"	140	206	25	M10
6003206	65	2-1/2"	76	142	25	M10
6003206	150	6"	168	234	25	M10
6003206	80	3"	90	156	25	M10
6003206	200	8"	219	285	25	M10
6003206	100	4"	114	180	25	M10
6003206	250	10"	273	339	25	M10

Note: Hot-dip galvanized and stainless steel options are available on request.