
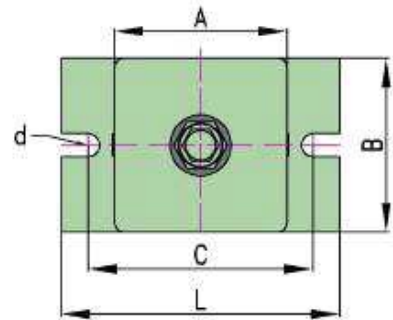


COMPLETELY HOUSED SPRING MOUNT

E

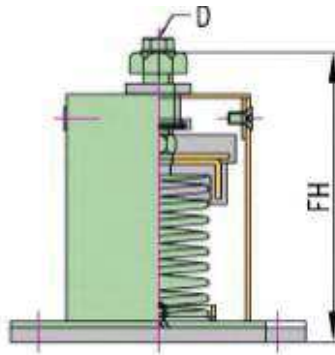

Full Enclosure for Maximum Isolation: Encased design provides superior vibration isolation and protection from external elements.

Integrated Acoustic Friction Pad: Reduces noise transmission and enhances vibration dampening.

Plated Leveling/Lock Bolt: Standard finish, with HDG and stainless steel options available upon request.

Optimal Diameter Ratio: 0.8 for reliable load stability and distribution.

Heavy-Duty Cast Iron Housing: Encased in durable cast iron with an 8mm rubber base on the lower cap for enhanced stability and friction.

Applications: Ideal for applications with high vibration isolation needs, including Chillers, Pumps, Fans, Condensing Units, Rooftop Package Units, Compressors, Generators, and similar heavy-duty equipment.

Compliance: Built to conform with BS 1726 (Part 1): 2002 standards.

Part No.	Color Code	Rec. Load KG	Max Deflection mm	A	B	C	D	d	L	FH
IC209101015	Purple	15	25	90	90	118	M8	12	145	145
IC20910030	Yellow	30	25	90	90	118	M8	12	145	145
IC20910050	Blue	50	25	90	90	118	M8	12	145	145
IC20910060	Blue	60	25	90	90	118	M8	12	145	145
IC20910075	Blue	75	25	90	90	118	M8	12	145	145
IC20910100	Green	100	25	90	90	118	M8	12	145	145
IC20910150	Orange	150	25	90	90	118	M8	12	145	145
IC20910175	Orange	175	25	90	90	118	M8	12	145	145
IC20910200	Red	200	25	90	90	118	M8	12	145	145
IC20910250	Purple	250	25	90	90	118	M8	12	145	145
IC20910300	Grey	300	25	125	125	156	M10	14	185	180
IC20910400	Red	400	25	125	125	156	M10	14	185	180
IC20910500	Brown	500	25	125	125	156	M10	14	185	180
IC20910600	Black	600	25	125	125	156	M10	14	185	180
IC20910800	Red	800	25	125	125	156	M10	14	185	180
IC209101050	White	1050	25	125	125	156	M10	14	185	180
IC209101250	Green	1250	25	125	125	156	M10	14	185	180
IC209101500	Orange	1500	25	125	125	156	M10	14	185	180