



HOUSED FOUR SPRING MOUNT

E

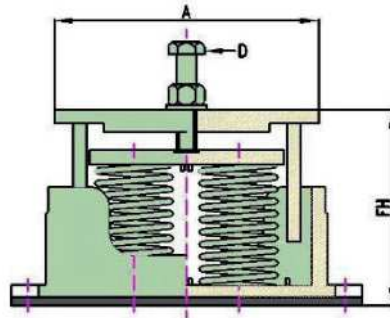

Superior Vibration Isolation: Four-spring configuration designed for exceptional vibration control and stability in high-load applications.

Integrated Acoustic Friction Pad: Reduces noise transmission, enhancing overall vibration dampening.

Plated Leveling/Lock Bolt: Available in standard plating, with HDG and stainless steel options upon request.

Optimized Diameter Ratio: 0.8, ensuring robust load support and even distribution.

Heavy-Duty Cast Iron Caps: Durable cast iron upper and lower caps, with an 8mm rubber base on the lower cap for enhanced friction and damping.

Applications: Perfect for Chillers, Pumps, Fans, Condensing Units, Rooftop Package Units, Compressors, Generators, and other large machinery requiring heavy duty vibration control.

Compliance: Manufactured to meet BS 1726 (Part 1): 2002 standards.

Part No.	Color Code	Rec. Load KG	Max Deflection mm	A	B	C	L	D	d	FH
IC20907015	Purple	15	25	100	70	140	160	M10	14	110
IC20907030	Orange	30	25	100	70	140	160	M10	14	110
IC20907050	Blue	50	25	100	70	140	160	M10	14	110
IC20907060	Blue	60	25	100	70	140	160	M10	14	110
IC20907075	Green	75	25	100	70	140	160	M10	14	110
IC20907100	Orange	100	25	100	70	140	160	M10	14	110
IC20907150	Orange	150	25	100	70	140	160	M10	14	110
IC20907175	Red	175	25	100	70	140	160	M10	14	110
IC20907200	Purple	200	25	100	70	140	160	M10	14	110
IC20907250	Orange	250	25	100	70	140	160	M10	14	110
IC20907300	Grey	300	25	127	85	180	200	M14	16	140
IC20907400	Red	400	25	127	85	180	200	M14	16	140
IC20907500	Brown	500	25	127	85	180	200	M14	16	140
IC20907600	Black	600	25	127	85	180	200	M14	16	140
IC20907800	Red	800	25	127	85	180	200	M14	16	140
IC209071050	White	1050	25	127	85	180	200	M14	16	140
IC209071250	Green	1250	25	127	85	180	200	M14	16	140
IC209071500	Orange	1500	25	127	85	180	200	M14	16	140