


HOUSED RUBBER HANGER

E

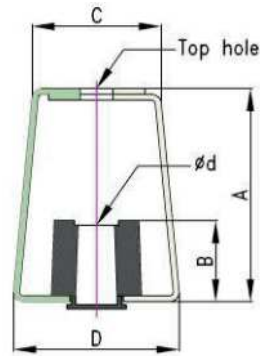

Enhanced Vibration Isolation: Six spring configurations for high-stability and efficiency in demanding applications.

Restricted Vertical Movement: Limits vertical displacement to ensure equipment stability and controlled movement.

Optimized Diameter Ratio: 0.8 for superior load distribution and stability.

Robust Steel Springs: Engineered to absorb and dampen vibrations effectively.

Leveling Bolt and Cap Screw: Standard in HDG, with stainless steel available on request.

Durable HDG Caps: Heavy-duty upper and lower caps in HDG, with an 8mm rubber base on the lower cap for enhanced friction and isolation.

Applications: Specifically designed for Chillers, Generators, Cooling Towers, and other heavy-duty equipment where controlled movement and stability are essential.

Compliance: Designed to meet BS 1726 (Part 1): 2002 standards

Part No.	Color Code	Rec. Load KG	Max Deflection mm	Top Hole mm	A	B	C	D	d
IC20902025	Black	25	3	12	80	33	40	50	12
IC20902050	Red	50	5	12	80	33	40	50	12
IC20902070	Black	70	6	12	80	33	40	50	12
IC20902100	Black	100	5	14	100	40	35	55	14
IC20902120	Red	120	6	14	100	40	35	55	14
IC20902150	Black	150	5	22	142	54	86	110	24
IC20902200	Black	200	7	22	142	54	86	110	24
IC20902300	Grey	300	10	22	142	54	86	110	24
IC20902400	Orange	400	12	22	142	54	86	110	24
IC20902500	Black	500	10	24	155	55	118	143	24
IC20902600	Grey	600	10	24	155	55	118	143	24
IC20902800	Orange	800	12	24	155	55	118	143	24
IC209021000	White	1000	12	24	155	55	118	143	24
IC209021250	Red	1250	14	24	155	55	118	143	24
IC209021500	Blue	1500	16	24	155	55	118	143	24