


HEAVY DUTY RUBBER LINED SPLIT CLAMP

A

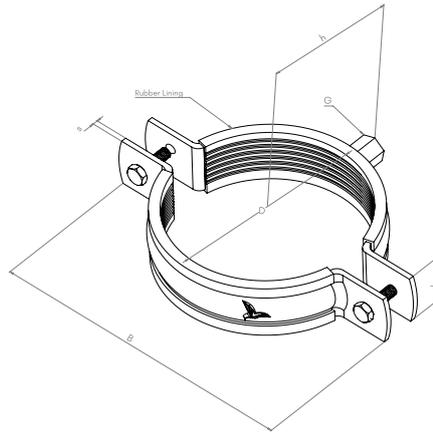

Material: Carbon Steel with EPDM Rubber Lining.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)

Hot Dip Galvanized (ASTM A153/EN ISO 1461)

Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.



Part No.	D (mm)	Size (inch)	- DN	Dia (mm)	G	B (mm)	H (mm)	h (mm)	b x s (mm)	Rec. Load KG	Qty Pack
IC11501015	15-19	3/8	10	15	M8/M10	81	55	35	30 x 2.5	200	25
IC11501022	20-25	1/2	15	22	M8/M10	84	58	37	30 x 2.5	200	25
IC11501028	26-30	3/4	20	28	M8/M10	91	64	40	30 x 2.5	200	25
IC11501035	32-36	1	25	35	M8/M10	98	70	43	30 x 2.5	200	25
IC11501042	40-45	1 1/4	32	42	M8/M10	109	80	48	30 x 2.5	200	25
IC11501048	46-51	1 1/2	40	48	M8/M10	115	86	51	30 x 2.5	200	25
IC11501054	53-59	-	-	54	M8/M10	122	93	55	30 x 2.5	200	25
IC11501060	60-64	2	50	60	M8/M10	129	99	57	30 x 2.5	200	25
IC11501070	65-72	-	-	70	M10/M12	136	116	71	30 x 3.0	250	25
IC11501075	74-80	2 1/2	65	75	M10/M12	144	123	74	30 x 3.0	250	25
IC11501083	81-86	-	-	83	M10/M12	152	130	78	30 x 3.0	250	25
IC11501090	87-92	3	80	90	M10/M12	159	136	81	30 x 3.0	250	25
IC11501100	99-109	3 1/2	-	100	M10/M12	175	154	90	30 x 3.0	250	25
IC11501115	109-116	4	100	115	M10/M12	182	160	93	30 x 3.0	250	25
IC11501125	125-133	-	-	125	M10/M12	200	178	102	30 x 3.0	250	25
IC11501140	132-140	-	-	133	M10/M12	207	184	104	30 x 3.0	250	25
IC11501168	159-169	6	150	168	M12,M16	254	220	120	38 x 4.0	380	15
IC11501183	178-188	-	-	183	M12,M16	274	239	130	38 x 4.0	380	15
IC11501203	194-204	-	-	203	M12,M16	290	255	138	38 x 4.0	380	15
IC11501210	203-213	-	-	210	M12,M16	299	264	143	38 x 4.0	380	15
IC11501220	217-227	8	200	220	M12,M16	322	278	150	38 x 4.0	380	2
IC11501250	240-250	-	-	250	M16	345	302	163	38 x 4.0	380	2
IC11501273	265-275	10	250	273	M16	367	327	175	48 x 5.0	920	2
IC11501325	313-325	12	300	325	M16	414	374	198	48 x 5.0	920	2
IC11501364	354-364	14	350	364	M16	453	412	217	48 x 5.0	920	2
IC11501408	398-410	16	400	408	M16	497	456	239	48 x 5.0	920	2
IC11501458	445-460	18	450	458	M16	548	506	264	48 x 5.0	920	2
IC11501509	499-510	18	500	509	M16	557	557	289	48 x 5.0	920	2

Note: Hot-dip galvanized and stainless steel options are available on request.