
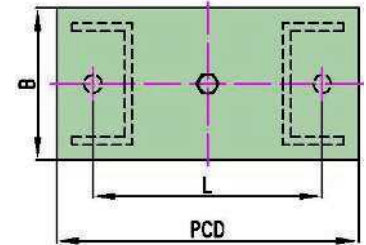


RESTRAINED SPRING MOUNT

E



Controlled Vertical Movement: Restrained design limits vertical displacement for added stability.

Diameter Ratio: 0.8, providing robust load support and even distribution.

Steel Spring: Engineered for effective vibration dampening and stability.

Leveling Bolt and Cap Screw: Standard HDG finish, with stainless steel option on request.

Durable HDG Caps: Upper and lower caps in HDG, with the lower cap featuring an 8mm rubber base for enhanced friction and isolation.

Applications: Ideal for equipment requiring restricted movement, providing stability and vibration isolation across various applications.

Compliance: Manufactured in line with BS 1726 (Part 1): 2002 standards.

Part No.	Color Code	Rec. Load KG	Max Deflection mm	A	B	C	D	d	FH
IC20911015	Purple	15	25	140	70	112	M8	12	145
IC20911030	Yellow	30	25	140	70	112	M8	12	145
IC20911050	Blue	50	25	140	70	112	M8	12	145
IC20911060	Blue	60	25	140	70	112	M8	12	145
IC20911075	Blue	75	25	140	70	112	M8	12	145
IC20911100	Green	100	25	140	70	112	M8	12	145
IC20911150	Orange	150	25	140	70	112	M8	12	145
IC20911175	Orange	175	25	140	70	112	M8	12	145
IC20911200	Red	200	25	140	70	112	M8	12	145
IC20911250	Purple	250	25	140	70	112	M8	12	145
IC20911300	Grey	300	25	165	850	138	M10	14	170
IC20911400	Red	400	25	165	850	138	M10	14	170
IC20911500	Brown	500	25	165	850	138	M10	14	170
IC20911600	Black	600	25	165	850	138	M10	14	170
IC20911800	Red	800	25	165	850	138	M10	14	170
IC209111050	White	1050	25	165	850	138	M10	14	170
IC209111250	Green	1250	25	165	850	138	M10	14	170
IC209111500	Orange	1500	25	165	850	138	M10	14	170