



# RUBBER LINED CLEVIS HANGER

A

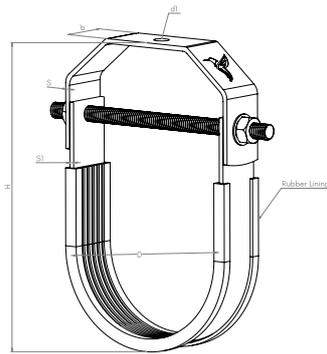

**Material:** Carbon Steel with EPDM Rubber Lining.

**Coating:** Zinc Plating  $\geq 5 \mu\text{m}$  (ASTM B 633/EN ISO 2081)

Hot Dip Galvanized (ASTM A153/EN ISO 1461)

Armor X 20

**Standards Compliance:** Meets MSS SP-58 for pipe supports.

**High Load Capacity:** Reinforced lock bolts ensure reliable support.

**Corrosion Resistance:** Different coating options make it suitable for indoor and outdoor & Coastal environments.

**Versatility:** Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

**Easy Installation:** Large opening angle with anti-loss screws for efficient setup.



NOISE REDUCING



Tested in accordance with ISO 3822-1

Part No.	D (mm)	Size (inch)	BOLT (mm)	H (mm)	b (mm)	s (mm)	s1 (mm)	d1 (mm)	Rec. Load KG	Qty BOX
IC11504022	22	1/2	M8 x 60	73	25	3.00	3.00	10	400	125
IC11504028	28	3/4	M8 x 68	79	25	3.00	3.00	10	400	125
IC11504035	35	1	M8 x 78	85	25	3.00	3.00	10	400	125
IC11504040	40	1 1/4	M8 x 82	95	25	3.00	3.00	10	400	125
IC11504048	48	1 1/2	M8 x 88	103	25	3.00	3.00	10	400	100
IC11504060	60	2	M10 x 110	120	25	3.00	3.00	10	400	75
IC11504073	73	2 1/2	M10 x 125	149	25	4.00	4.00	10	650	60
IC11504089	89	3	M10 x 140	176	25	4.00	4.00	10	650	50
IC11504105	105	3 1/2	M10 x 155	176	25	4.00	4.00	10	650	40
IC11504115	115	4	M10 x 170	201	32	6.00	6.00	10	800	20
IC11504140	140	5	M12 x 195	235	32	6.00	6.00	12	800	15
IC11504168	168	6	M12 x 225	269	40	6.00	6.00	12	1100	10
IC11504219	219	8	M12 x 275	341	40	6.00	6.00	12	1100	15
IC11504273	273	10	M16 x 360	422	40	6.00	6.00	16	1100	10
IC11504323	323	12	M20 x 420	493	50	9.00	6.00	20	1500	6
IC11504355	355	14	M20 x 455	559	50	9.00	6.00	20	1500	6
IC11504406	406	16	M24 x 510	613	65	12.00	6.00	24	1750	3
IC11504457	457	18	M24 x 555	678	65	12.00	6.00	24	1750	3
IC11504508	508	20	M24 x 610	718	75	12.00	9.00	30	2200	2
IC11504610	610	24	M24 x 710	853	75	16.00	9.00	30	2700	2
IC11504755	755	30	M24 x 890	998	75	19.00	9.00	30	3000	1

**Note:** Hot-dip galvanized and stainless steel options are available on request.