



RUBBER LINED U STRAP

A

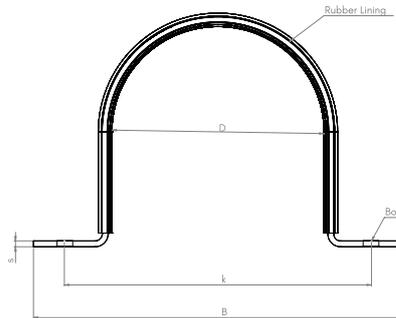

Material: Carbon Steel with EPDM Rubber Lining.
Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
 Hot Dip Galvanized (ASTM A153/EN ISO 1461)
 Armor X 20
Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.
Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.
Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.
Easy Installation: Large opening angle with anti-loss screws for efficient setup.



Part No.	D (mm)	Size (inch)	BOLT (mm)	B (mm)	b x s (mm)	k (mm)	Rec. Load KG	Qty Pack
IC11505022	22	1/2	M8	79	25 x 2.0	54.00	550	500
IC11505028	28	3/4	M8	85	25 x 2.0	60.00	550	400
IC11505035	35	1	M8	92	25 x 2.0	67.00	550	400
IC11505040	40	1 1/4	M8	99	25 x 2.0	74.00	550	350
IC11505048	48	1 1/2	M8	105	25 x 2.0	80.00	550	300
IC11505054	54	-	M8	111	25 x 2.0	86.00	550	250
IC11505060	60	2	M8	117	25 x 2.0	92.00	550	200
IC11505067	67	-	M8	124	25 x 2.0	99.00	550	200
IC11505075	75	2 1/2	M8	148	25 x 3.0	116.00	650	150
IC11505082	82	-	M8	155	25 x 3.0	123.00	650	150
IC11505090	90	3	M8	163	25 x 3.0	131.00	650	150
IC115050100	100	3 1/2	M8	173	25 x 3.0	141.00	650	150
IC11505108	108	-	M8	181	25 x 3.0	149.00	650	125
IC11505115	115	4	M8	188	25 x 3.0	156.00	650	125
IC11505126	126	-	M10	199	25 x 3.0	167.00	650	125
IC11505140	140	5	M10	213	25 x 3.0	181.00	650	100
IC11505148	148	-	M10	221	25 x 3.0	189.00	650	100
IC11505155	155	-	M10	228	25 x 3.0	196.00	650	100
IC11505168	168	6	M10	240	25 x 3.0	208.00	650	100
IC11505179	179	-	M10	252	25 x 3.0	220.00	650	100
IC11505190	190	-	M10	263	38 x 3.0	231.00	900	50
IC11505205	205	-	M10	278	38 x 3.0	246.00	900	50
IC11505219	219	8	M10	292	38 x 3.0	260.00	900	50
IC11505230	230	-	M10	303	38 x 3.0	271.00	900	30

Note: Hot-dip galvanized and stainless steel options are available on request.