
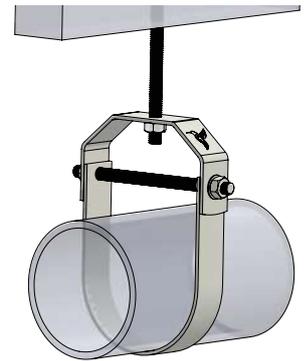


CLEVIS HANGER

A

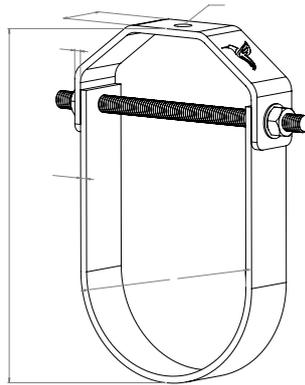

Material: Carbon Steel.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)

Hot Dip Galvanized (ASTM A153/EN ISO 1461)

Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.



Part No.	D (mm)	Size (inch)	BOLT (mm)	H (mm)	b (mm)	s (mm)	s1 (mm)	d1 (mm)	Rec. Load KG	Qty BOX
IC12504022	22	1/2	M8 x 60	73	25	3.00	3.00	10	400	125
IC12504028	28	3/4	M8 x 68	79	25	3.00	3.00	10	400	125
IC12504035	35	1	M8 x 78	85	25	3.00	3.00	10	400	125
IC12504040	40	1 1/4	M8 x 82	95	25	3.00	3.00	10	400	125
IC12504048	48	1 1/2	M8 x 88	103	25	3.00	3.00	10	400	100
IC12504060	60	2	M10 x 110	120	25	3.00	3.00	10	400	75
IC12504073	73	2 1/2	M10 x 125	149	25	4.00	4.00	10	650	60
IC12504089	89	3	M10 x 140	176	25	4.00	4.00	10	650	50
IC12504105	105	3 1/2	M10 x 155	176	25	4.00	4.00	10	650	40
IC12504115	115	4	M10 x 170	201	32	6.00	6.00	10	800	20
IC12504140	140	5	M12 x 195	235	32	6.00	6.00	12	800	15
IC12504168	168	6	M12 x 225	269	40	6.00	6.00	12	1100	10
IC12504219	219	8	M12 x 275	341	40	6.00	6.00	12	1100	15
IC12504273	273	10	M16 x 360	422	40	6.00	6.00	16	1100	10
IC12504323	323	12	M20 x 420	493	50	9.00	6.00	20	1500	6
IC12504355	355	14	M20 x 455	559	50	9.00	6.00	20	1500	6
IC12504406	406	16	M24 x 510	613	65	12.00	6.00	24	1750	3
IC12504457	457	18	M24 x 555	678	65	12.00	6.00	24	1750	3
IC12504508	508	20	M24 x 610	718	75	12.00	9.00	30	2200	2
IC12504610	610	24	M24 x 710	853	75	16.00	9.00	30	2700	2
IC12504755	755	30	M24 x 890	998	75	19.00	9.00	30	3000	1

Note: Hot-dip galvanized and stainless steel options are available on request.