


INCOFIX DROPIN ANCHOR

F

Drop-in anchors are cylindrical internally threaded expansion anchors designed for anchoring threaded rods into solid concrete. They are installed flush with the surface and expand using a setting tool to create a secure mechanical interlock. Commonly used in suspended HVAC systems, cable trays, piping, and fire protection installations.

- Standard:** As per ASTM E488 / ACI 355.2
- Material:** Zinc-plated carbon steel
- Finish Options:** Electro-galvanized / SS A4 for corrosive environments
- Thread Type:** Metric ISO coarse, 60° thread angle
- Installation Method:** Hammer-set using appropriate setting tool
- Substrate:** Solid concrete only (not suitable for hollow blocks or brick)

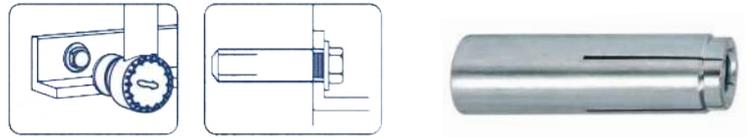

Part No.	Anchor Size	Internal Thread	Drill Hole Diameter	Anchor Body Length	Setting Tool Ref	Pull-Out Strength (kN)	Shear Strength (kN)
IC40201006	M6	M6	8	25	SET-M6	2.48	2.91
IC40201008	M8	M8	10	30	SET-M8	3.31	3.84
IC40201010	M10	M10	12	40	SET-M10	4.28	5.1
IC40201012	M12	M12	15	50	SET-M12	6.1	8.3
IC40201016	M16	M16	20	65	SET-M16	9.1	18.52
IC40201020	M20	M20	25	80	SET-M20	12.3	27.13