


SUSPENDED PIPE CLAMP

A

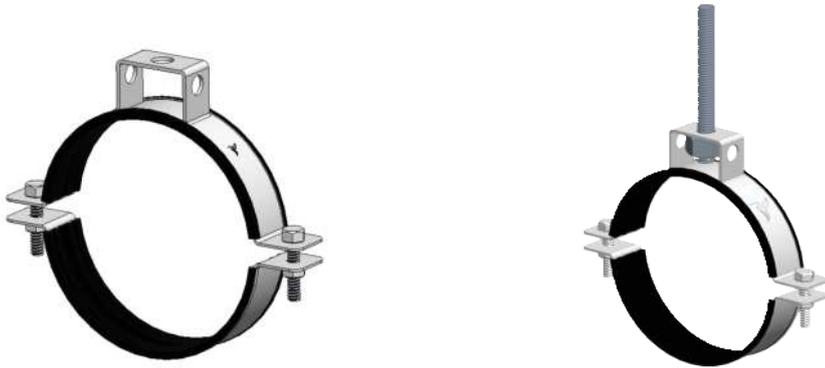

Material: Carbon Steel with EPDM Rubber Lining.

Coating: Zinc Plating $\geq 5 \mu\text{m}$ (ASTM B 633/EN ISO 2081)
Hot Dip Galvanized (ASTM A153/EN ISO 1461)
Armor X 20

Standards Compliance: Meets MSS SP-58 for pipe supports.

High Load Capacity: Reinforced lock bolts ensure reliable support.

Corrosion Resistance: Different coating options make it suitable for indoor and outdoor & Coastal environments.

Versatility: Suitable for horizontal and vertical applications, compatible with rubber support inserts for chilled water pipes.

Easy Installation: Large opening angle with anti-loss screws for efficient setup.

NOISE REDUCING



Tested in accordance with ISO 9822-1

Part No.	Nominal Diameter (DN)	D (mm)	Bolt Spec	Design Load (kN)
IC125010865	DN65	63.5	M12	9.5
IC12501080	DN80	76.1	M12	9.5
IC12501180	DN80	88.9	M12	9.5
IC12501100	DN100	108	M12	9.5
IC12501125	DN125	140	M12	9.5
IC12501150	DN150	168	M12	9.5

Note: Hot-dip galvanized and stainless steel options are available on request.